



Windicator for the Air Arms S400 / S410 Rifle.

Thank you for your purchase. Your pack should contain -

- 1 off Windicator
- 1 off 2.0mm allen key.

Safety first

Observe safe practices when handling your rifle and follow the manufacturers safety instructions when doing so. Check your rifle is not loaded and is de-cocked when ever working on it.

Installation.

1. Remove the air filler cap.
2. Loosen the 2 retaining grub screws holding the factory fitted barrel band from the underside.

3. Ease barrel band along the barrel – it is not necessary to completely remove it.
4. Take the Rowan Engineering Windicator and decide to have the arm on the left or right of the rifle and slide it on to the air cylinder.


IMPORTANT

The windicator **MUST** be positioned at **LEAST** 25mm along the cylinder away from the barrel band.

This is to ensure the safety relief section of the cylinder is allowed to vent in the case of over pressure .See photo 1

5. Gently tighten the clamping ring.
6. Re-fit the barrel band and filler cap.

Photo 1

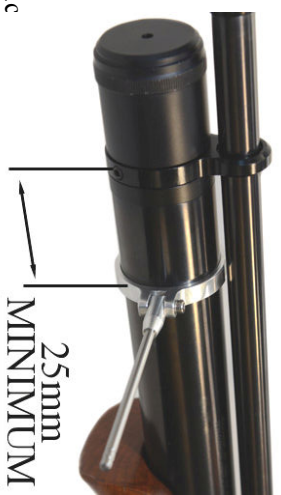

www.rowanengineering.co.uk