



150mm & 125mm Universal Sidewheel
Thank you for your purchase. Please read these instructions before fitting.

Your package should contain –

- 1 off sidewheel.
- 5 off clamp jaws.
- 1 off retaining ring.
- 5 off m4 x 12mm grub screws
- 8 off m3 x 12mm socket screws
- 1 off 2.0mm allen key
- 1 off 2.5mm allen key

Safety first.

Observe safe practices when handling your rifle and follow the manufacturer's safety instructions when doing so.

Take extra care when working on your rifle and preferably remove your scope from your rifle when fitting the wheel.

The wheel comes fitted with 5 jaws. They may be moved in to different configurations to match the shape and number of notched in the PA turret.

It is possible to use :-
5 jaws spaced at 72 degrees.
4 jaws spaced at 90 degrees.
3 jaws spaced at 120 degrees.

To change the jaw positions first remove the 8 x cap head screws lift off the retaining ring.

Set the desired number and position of the jaws to best suit the PA turret. Usually the jaws will be positioned to fit in to the grooves of the turret.


Note the 2 indents in the retaining ring and wheel body for alignment. Start with a jaw in the detent position and then place subsequent jaws spaced as required.

Re position the grub screws in the retaining ring to match the jaw positions.

Re assemble the ring over the jaws and on to the wheel using the 8 x M3 cap head screws

Place the wheel on to the PA turret and gently tighten the grub screws evenly to centre the wheel in the required position

www.rowanengineering.com

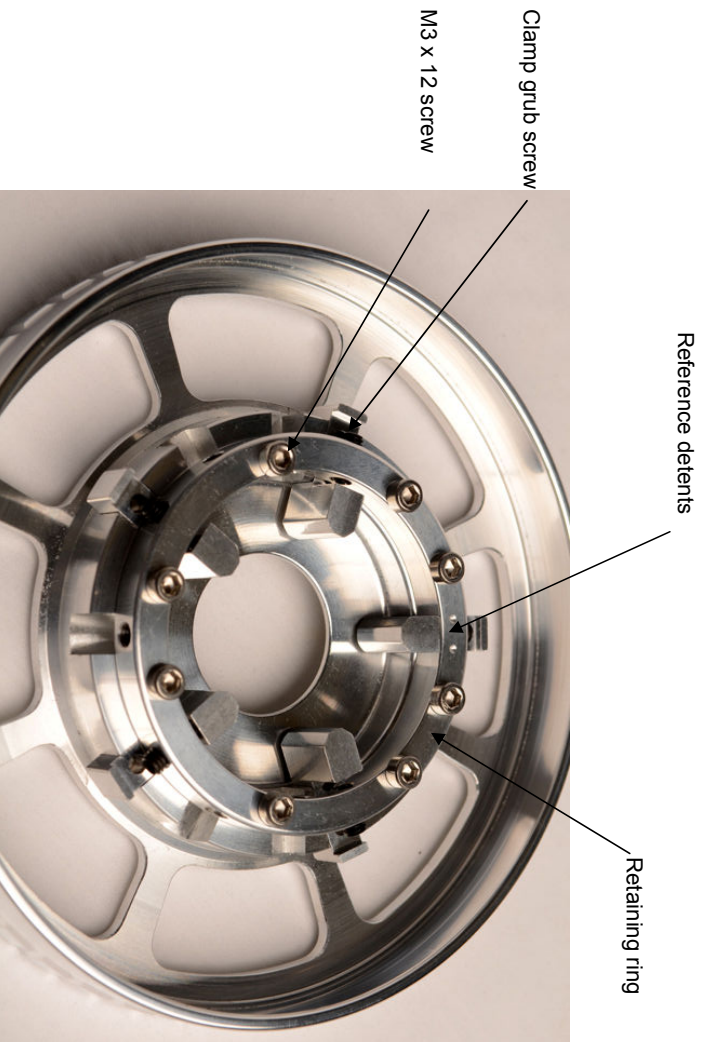

www.rowanengineering.com