



Single Shot Loader .177 and .22 cal. Daystate MK4, Huntsman , Air Wolf, Air Ranger

Thank you for your purchase. Please read these fitting instructions before using the loader.

Your kit should contain –
1 off SSL
1 off 1.5mm short allen key

Safety first.

Observe safe practices when handling your rifle and follow the manufacturer's safety instructions when doing so.

Take extra care when working on your rifle. Ensure that the rifle is switched OFF and the safety catch is set to safe and is absolutely not loaded with pellets.


1. Cock the rifle and slide the loader on to the action from either the left or right side of the rifle depending on your preference. This is done in a similar manner as fitting the Daystate multi-shot magazine.

2. Cocking the action will flip out the loader arm.

3. A M3 grub screw located in the side wall of the loader. This can be optionally very gently tightened to locate the loader semi-permanently in position.

Access the grub screw from the central slot in the loader body.

The arrowed position is for left side fitting. Swap the grub screw in to the threaded hole on the other side of the loader for right fitting.

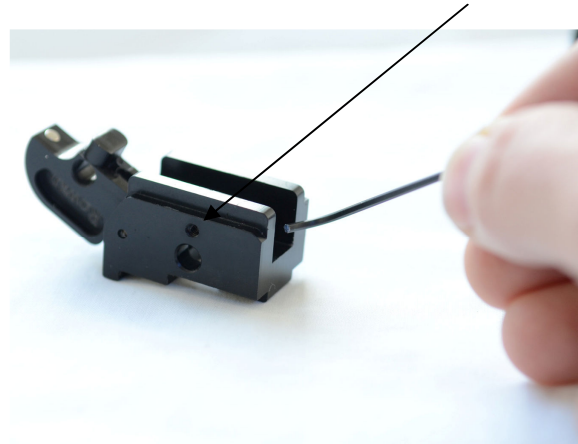

The loader is now ready for use.